


## Konfigurationsbeispiel SIP Trunk LEW TeINet Innovaphone

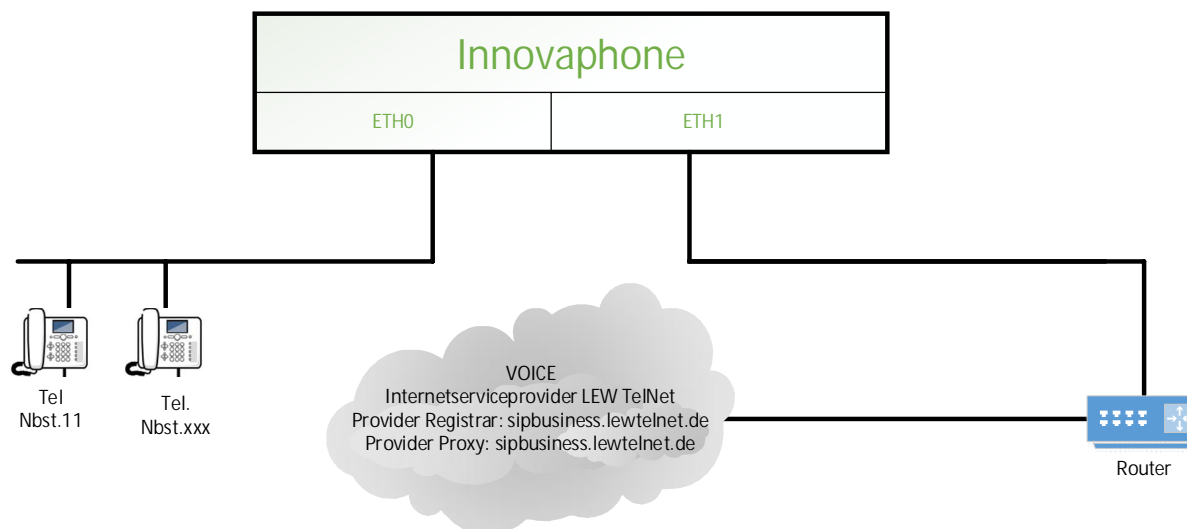

Softwareversion innovaphone: V12 sr32  
Beispielkonfiguration mit 2 Sprachkanäle mit nationalen Rufnummernformat.

Name: LEW

Disable:

Type: Provider

Transport: UDP Without registration

AOR: 082121819940 @ sipbusiness.lewtelnet.de

Local Hostname: \_\_\_\_\_

Local Port: \_\_\_\_\_

Proxy: sipbusiness.lewtelnet.de

STUN Server: \_\_\_\_\_

---

Authorization

Username: 082121819940

Password: \*\*\*\*\* Retype: \*\*\*\*\*

---

Media Properties

General Coder Preference: G711A Framesize [ms]: 20 Silence Compression  Exclusive

Local Network Coder: G711A Framesize [ms]: 20 Silence Compression

Enable T.38  No DTMF Detection  Enable PCM  Media-Relay: On Video

SRTP Cipher: AES128/32 SRTP Key Exchange: No encryption No ICE  No RTCP-MUX

Record to (URL): \_\_\_\_\_

---

SIP Interop Tweaks

Proposed Registration Interval [s]: 600

Accept INVITE's from Anywhere:

Enforce Sending Complete:  (affects outgoing SIP calls only)

No Video:

To Header when Sending INVITE: Called Party (affects outgoing SIP calls only)

From Header when Sending INVITE: Fixed AOR

Identity Header when Sending INVITE: CGPN in user part of URI

Reliability of Provisional Responses: Supported (affects outgoing SIP calls only)

Microsoft Presence Format:

Advanced: /rem-cn-capability \_\_\_\_\_

---

Internal Registration

Protocol: H.323

STUN Server: \_\_\_\_\_

Gatekeeper Address: 127.0.0.1 (primary)

Gatekeeper Address: \_\_\_\_\_ (secondary)

Gatekeeper ID: \_\_\_\_\_

Name: AMT

Number: \_\_\_\_\_

Password: \_\_\_\_\_ Retype: \_\_\_\_\_

OK Cancel Apply Delete Help

CGPN In

International	→	00	
	→		

CDPN In

International	498212181994	→	
	498212181994	→	
	00498212181994	→	
	08212181994	→	
	2181994	→	
		→	

CGPN Out

00	→	International	
0	→	International	49
	→	International	498212181994
	→		

CDPN Out

	→		
--	---	--	--

OK Cancel Apply Help

From	To	Counter	CGPN Maps
SIP1:LEW	RS1:LEW		
RS1:LEW	→ TONE		
	→ 00 → 00 MAP	000... → 000	
		00... → 00049	
		0... → 00049821	
		→ 000498212181994	
	→ MAP	000... → 00	
		00... → 0	
		0... → 0821	
		→ 08212181994	
	→ SIP1:LEW b		
SIP1:LEW RS1:LEW	→ TEL1		
SIP1:LEW	→ TEL1		
SIP1:LEW	→ TEL1		
SIP1:LEW	→ TEL1		

Eckdaten:

Codec: G711 A-Law  
G722 nur im LEW TelNet Netz möglich  
DTMF-Signalisierung: RFC2833  
Transportprotokoll: UDP  
Proxy: sipbusiness.lewtelnet.de / 217.24.234.145  
SIP-Port: 5060  
RTP-Port Bereich: 30000 bis 65535  
RTP IP-Ranges: 217.24.234.151 bis 217.24.234.154

Fax: kein T.38 möglich  
Deaktivieren des ECM-Modus und max. Baudrate 9600